


TRUSTED PAY CS89+ SOUND BOX


— User Manual —

ACCESSORIES



Sound Box	1 pcs
Charging Cable	1 pcs
User Manual	1 pcs

DIAGRAM

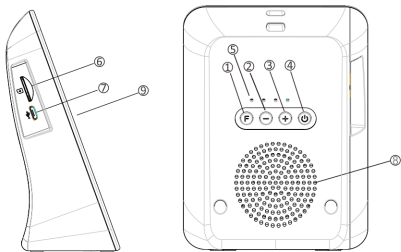

- 1, Function 2, Volume - 3, Volume + 4, Power
5, Indicators 6, SIM Slot 7, USB Port 8, Speaker
9, Display

OPERATION

Keys and Slots	Description
Function	Press: Broadcast the last message Press and hold(1s): Broadcast the version and status
Volume -	Press: Turn down the volume Press and hold(3s): Enter into AP config mode or quit
Volume +	Press: Turn up the volume Press and hold(3s): Switch network mode between Cellular and Wi-Fi.
Power	Press and hold 1s for power on, 3s for power off
Combination Key	Press and hold + and - at same time for 5s to reset. Press and hold F and + at same time for 5s to change Language.
Insert SIM	Insert SIM card according the icon beside the slot
Remove SIM	Push SIM Card to pop it up

Indicators	Description
Red LED	ON: Power on OFF: Power off
Yellow LED	Flash: Low battery ON: Battery in charging, OFF: Full battery
Blue LED	ON: Network connection is available OFF: Network connection is unavailable
Green LED	ON: Server connection is available OFF: Server connection is unavailable

SPECIFICATION

Items	Description
Processor	32-bit, high performance
Communication	4G, Wi-Fi(2.4G)
Keys	4 keys: Power, Volume +, Volume -, Function
Display	2.4" TFT LCD, 320*240 pixels
Audio	High power speaker
Indicator	One multi-color LED
Port	Type C USB Port *1
Power	Operating Power: DC5V/1.0A
Battery	Built-in Li-ion battery, 2000mAh/3.7V
Dimension	140mm*100mm*62mm
Weight	230g ±5g

WI-FI SETTING

AP Configuration

- 1, In Wi-Fi mode, press and hold Volume - button for 3~5 seconds to enter into web configuration mode.
- 2, Open the Wi-Fi setting on your mobile phone, find and connect the AP named XXXX-SOUNDBOX (XXXX is device model)
- 3, When the XXXX-SOUNDBOX connection is successful, the browser app will be run and enter into "192.168.4.1" the configuration page automatically.
Select the AP you want to connect, and input the password of this AP (5G Wi-Fi is not supported)
- 4, Wi-Fi connect success will be displayed when the setting is correct, and the blue LED will be on.

FAQ

1. Q: Power off automatically
A: The battery is out, please charge for two hours at least.
2. Q: Unable to charge
A: Please check the connection of cable and adaptor.
3. Q: Network connection is unavailable.
A: Please check the SIM installation, and make sure it is in normal status.
4. Q: Don't play the message.
A: Please check the network.
Check if the sound box registration or subscription is successful.
Contact your distributor for help.

Disclaimer

Due to the continuous update of the product, some details in this manual may not match the product, please refer to the actual product.

PACKAGE


Packing List		
☒	Terminal	*1 pcs
☒	Charging Cable	*1 pcs
☒	User Manual	*1 pcs
☐		

Product certificate


Surveyor _____ Check① _____

TRUSTED PAY CS89 SOUND BOX

— User Manual —




ACCESSORIES

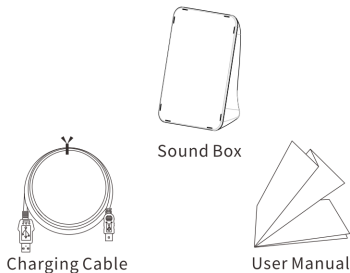

Sound Box	1 pcs
Charging Cable	1 pcs
User Manual	1 pcs

DIAGRAM



- 1, Indicator 2, USB Port 3, Power 4, Volume +
5, Volume - 6, Function 7, SIM Slot 8, Speaker
9, Segment code LCD

OPERATION

Keys and Slots	Description
Function	Press: Broadcast the last message Press and hold(1s): Broadcast the version and status
Volume -	Press: Turn down the volume Press and hold(3s): Enter into AP config mode or quit
Volume +	Press: Turn up the volume Press and hold(3s): Switch network mode between Cellular and Wi-Fi.
Power	Press and hold 1s for power on, 3s for power off
Combination Key	Press and hold + and - at same time for 5s to reset. Press and hold F and + at same time for 5s to change Language.
Insert SIM	Insert SIM card according the icon beside the slot
Remove SIM	Push SIM Card to pop it up

Indicators	Description
Red LED	ON: Power on when pressing Power button
Blue LED	ON: Network connection is available OFF: Network connection is unavailable
Green LED	ON: Server connection is available OFF: Server connection is unavailable

SPECIFICATION

Items	Description
Processor	32-bit, high performance
Communication	4G, Wi-Fi(2.4G)
Keys	4 keys: Power, Volume +, Volume -, Function
Display	Segment code LCD, display amount number, battery, etc.
Audio	High power speaker
Indicator	One multi-color LED
Port	Type C USB Port *1
Power	Operating Power: DC5V/1.0A
Battery	Built-in Li-ion battery, 2000mAh/3.7V
Dimension	140mm*100mm*62mm
Weight	230g ±5g

WI-FI SETTING

AP Configuration

1, In Wi-Fi mode, press and hold Volume - button for 3~5 seconds to enter into web configuration mode.

2, Open the Wi-Fi setting on your mobile phone, find and connect the AP named XXXX-SOUNDBOX (XXXX is the device model).

3, When the XXXX-SOUNDBOX connection is successful, the browser app will be run and enter into "192.168.4.1" the configuration page automatically.
Select the AP you want to connect, and input the password of this AP (5G Wi-Fi is not supported)

4, Wi-Fi connect success will be displayed when the setting is correct, and the blue LED will be on.

FAQ

- Q: Power off automatically
A: The battery is out, please charge for two hours at least.
- Q: Unable to charge
A: Please check the connection of cable and adaptor.
- Q: Network connection is unavailable.
A: Please check the SIM installation, and make sure it is in normal status.
- Q: Don't play the message.
A: Please check the network.
Check if the sound box registration or subscription is successful.
Contact your distributor for help.

Disclaimer

Due to the continuous update of the product, some details in this manual may not match the product, please refer to the actual product.

PACKAGE

Packing List

☒	Terminal	*1 pcs
☒	Charging Cable	*1 pcs
☒	User Manual	*1 pcs
☐		

Product certificate

Surveyor _____ Check① _____